



# 3. 6X10mm陶瓷管慢断欧规保险丝 Time-lag Ceramic Tube Fuse

Type 3CTV

Time-lag Ceramic Tube Fuse With

Pig-Tail Series



Approvals

VDE	250mA~6.3A
CSA Acceptance	250mA~6.3A
UL Recognized	250mA~6.3A
CCC	250mA~6.3A

Electrical Characteristics  
(IEC-127-3 STANDARD SHEET 4)

Rated Current	1.5In		2.1In		2.75In		4In		10In	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
250mA-6.3A	60 min	2 min	400 ms	10 sec	150 ms	3 sec	20 ms	150 ms		

Cartridge Catalog Number	Ampere Rating [In]	Voltage Rating (V)	Nominal Resistance Cold Ohms	Voltage Drop (mv)MAX	Nominal Melting I <sup>2</sup> t A <sup>2</sup> Sec
3CTV.250	250mA	125V 250V	0.630	220	0.312
3CTV.315	315mA		0.460	210	0.422
3CTV.400	400mA		0.360	200	0.755
3CTV.500	500mA		0.310	190	1.320
3CTV.630	830mA		0.178	180	2.550
3CTV.800	800mA		0.125	160	3.250
3CTV1	1A		0.092	140	6.950
3CTV1.25	1.25A		0.065	130	12.10
3CTV1.60	1.6A		0.048	120	18.20
3CTV2	2A		0.035	100	20.80
3CTV2.5	2.5A		0.028	100	32.50
3CTV3.15	3.15A		0.020	100	40.80
3CTV4	4A		0.016	100	95.00
3CTV5	5A		0.014	100	140.0
3CTV6.3	6.3A		0.009	100	240.0

Interrupting Ratings

35 amperes or 10 x rated current; whichever is greater at 250V AC

Operating Temperature

-55°C to +125°C

Physical Specification



Materials

Ceramic Body/Nickel Plated Brass Caps  
Lead Wire: Diameter 0.6 mm

Packaging

In Bulk:  
3CTV-1,000pcs per box

Mechanical Dimensions

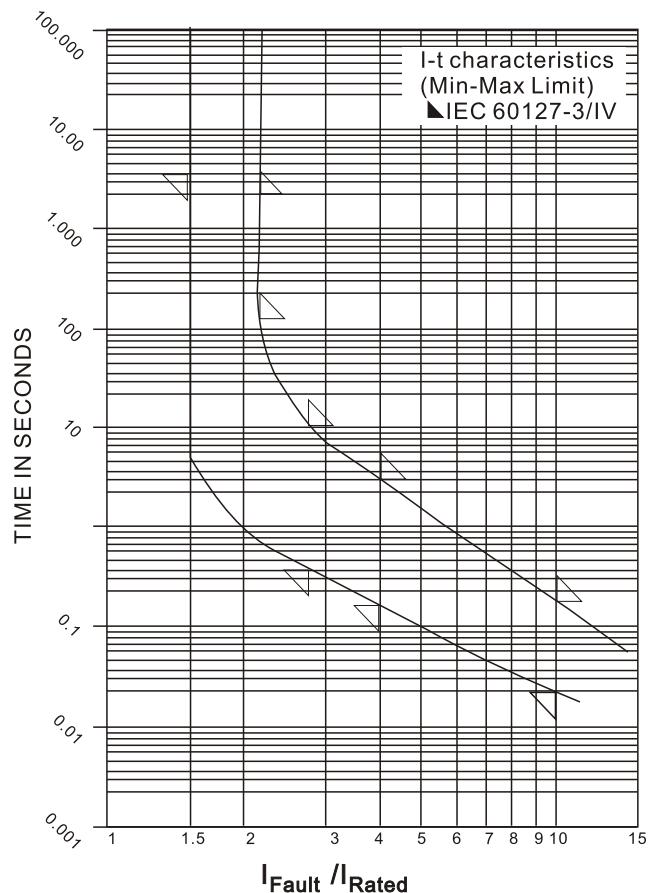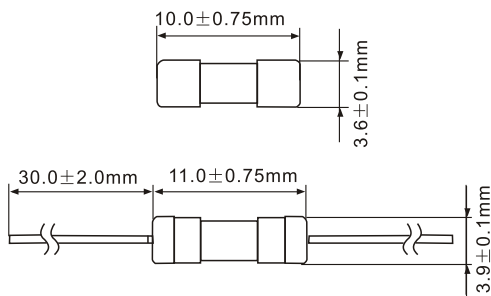

富源电子科技有限公司

富源电子科技有限公司

HTTP: //www.fuyuanfuse.com

地址: 东莞市东城区下桥银桥工业区

E-mail: fuyuanfuse@163.com

TEL: 0769-23115816 FAX: 0769-23115819