


# Fast Acting Ceramic Tube Fuse 5X20mm 陶瓷管快断欧规保险丝

Type 5CFV

5X20mm

Fast Acting High Breaking Capacity

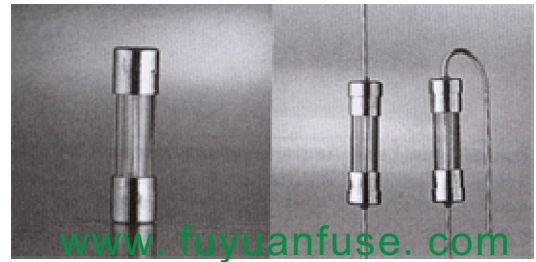

www.fuyuanfuse.com

## Approvals

SEMKO 63mA~6.3A  
 VDE 63mA~6.3A  
 BSI 63mA~6.3A  
 IMQ 63mA~6.3A  
 UL Recognized 63mA~10A  
 CSA Acceptance 63mA~10A

CCC 63mA~6.3A



Cartridge Catalog Number	Axial Lead Catalog Number	Ampere Rating [In]	Voltage Rating (V)	Nominal Resistance Cold Ohms	Voltage Drop (mv)MAX	Nominal Meltinglt A Sec
5CFV.063	5CFVP.063	63mA	250V	10.390	1500	0.00063
5CFV.080	5CFVP.080	80mA		7.7820	1300	0.00093
5CFV.100	5CFVP.100	100mA		5.1210	1200	0.00180
5CFV.125	5CFVP.125	125mA		4.4490	1100	0.00390
5CFV.160	5CFVP.160	160mA		2.7060	1100	0.00768
5CFV.200	5CFVP.200	200mA		2.0270	1100	0.01120
5CFV.250	5CFVP.250	250mA		1.5690	1100	0.03125
5CFV.315	5CFVP.315	315mA		0.9780	1100	0.03969
5CFV.400	5CFVP.400	400mA		0.3740	900	0.05200
5CFV.500	5CFVP.500	500mA		0.2690	800	0.10000
5CFV.630	5CFVP.630	630mA		0.1900	700	0.39690
5CFV.800	5CFVP.800	800mA		0.1320	600	0.64000
5CFV1	5CFVP1	1A		0.0960	550	1.20000
5CFV1.25	5CFVP1.25	1.25A		0.1400	500	0.46800
5CFV1.60	5CFVP1.60	1.6A		0.1040	450	0.66500
5CFV2	5CFVP2	2A		0.0840	400	2.00000
5CFV2.50	5CFVP2.50	2.5A		0.0570	350	3.43700
5CFV3.15	5CFVP3.15	3.15A		0.0390	300	10.9140
5CFV4	5CFVP4	4A		0.0310	250	16.0000
5CFV5	5CFVP5	5A		0.0230	200	37.5000
5CFV6.30	5CFVP6.30	6.3A	0.0170	200	47.6280	
5CFV8	5CFVP8	8A	0.0110	190	83.2000	
5CFV10	5CFVP10	10A	0.0081	180	170.000	

## Electrical Characteristics

Rated Current	1.5In		2.1In		2.75In		4In		10In
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MAX
63mA~100mA	60 min	30 min	10 ms	2 sec	3 ms	300 ms	20 ms		
8A~10A	60 min	30 min	10 ms	3 sec	3 ms	300 ms	20 ms		

Interrupting Ratings  
 1500 amperes at 250V AC

Operating Temperature  
 -55°C to +125°C

## Physical Specification

### Materials

Ceramic body/Nickel Plated Brass Caps

Lead Wire:



Tin-lead plated Copper, Diameter 0.65mm

### Packaging

In Bulk:

5CFV-1.000 Pcs:5CFVP-500 pcs per box

### Mechanical Dimensions

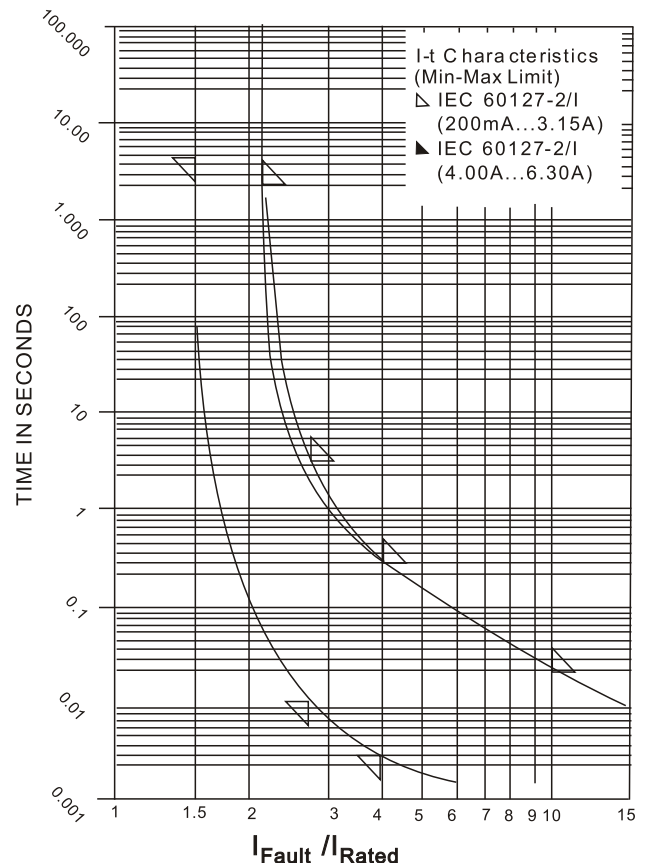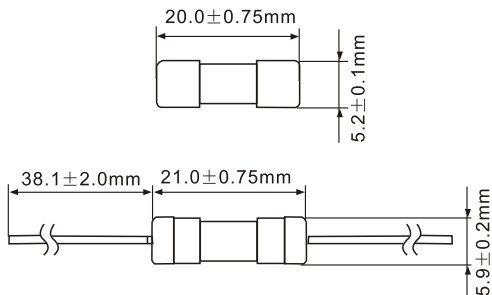

富源电子科技有限公司

富源电子科技有限公司

HTTP: //www.fuyuanfuse.com

地址: 东莞市东城区下桥银桥工业区

E-mail: fuyuanfuse@163.com

TEL: 0769-23115816 FAX: 0769-23115819