

6. 3X32mm陶瓷管慢断美规保险丝 Time-lag Ceramic Tube Fuse

Type 6CTU/6CTUP


6.3X32mm

Time-Lag Ceramic Tube Fuse Series



Approvals

6GTU/6GTUP	
UL Listed	100mA-20A
UL Recognized	100mA-15A
CSA Certified	15.1A-20A
MITI	1A-15A

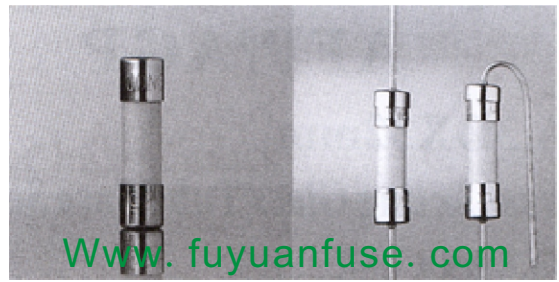

www.fuyuanfuse.com

Electrical Characteristics

Rated Current	1In		2In	
	MIN	MAX	MIN	MAX
10mA-30A	4 Hrs.	1hr	2 Sec	30 Sec

Interrupting Ratings

10mA-10A:	10,000 amperes at 125V Ac
10mA-1A:	35 amperes at 250V AC
1.2A-3.5A:	100 amperes at 250V AC
3.75A-10A:	200 amperes at 250V AC
10.1A-25A:	750 amperes at 32V AC
15.1A-20A:	750 amperes at 32V AC

Operating Temperature

-55°C to +125°C

Physical Specification

Materials

Ceramic body/Nickel Plated Brass Caps

Lead Wire:


Diameter \varnothing 0.8mm

Packaging


In Bulk:

6CTU-500 pcs; 6CTUP-250 pcs per box

Mechanical Dimensions

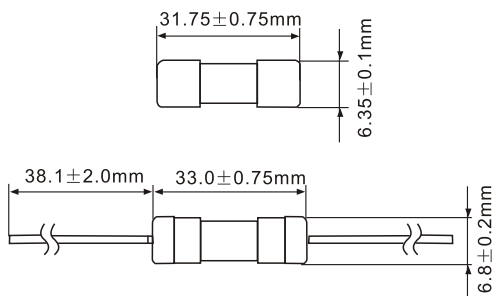

Cartridge catalog Number	Axial Lead Catalog Number	Ampere Rating (In)	Voltage Rating (v)	Nominal Resistance cold Ohms	Nominal Melting [†] t A ² Sec
6CTU .100	6CTUP .100	100mA	250V	15.669	0.02000
6CTU .125	6CTUP .125	125mA		10.596	0.03125
6CTU .150	6CTUP .150	150mA		8.4090	0.05625
6CTU .160	6CTUP .160	160mA		7.6250	0.06400
6CTU .175	6CTUP .175	175mA		6.9250	0.07656
6CTU .180	6CTUP .180	180mA		5.9110	0.08790
6CTU .200	6CTUP .200	200mA		16.920	0.14000
6CTU .250	6CTUP .250	250mA		10.225	0.18750
6CTU .300	6CTUP .300	300mA		8.3170	0.31500
6CTU .315	6CTUP .315	315mA		8.0000	0.34720
6CTU .350	6CTUP .350	350mA		5.5000	0.42870
6CTU .375	6CTUP .375	375mA		4.3110	0.49210
6CTU .400	6CTUP .400	400mA		4.2090	0.80000
6CTU .500	6CTUP .500	500mA		0.6549	0.12500
6CTU .600	6CTUP .600	600mA		0.6125	0.18000
6CTU .700	6CTUP .700	700mA		0.4208	0.24500
6CTU .750	6CTUP .750	750mA		0.3801	0.45000
6CTU .800	6CTUP .800	800mA		0.3647	0.64000
6CTU 1	6CTUP1	1A		0.2515	1.50000
6CTU 1.25	6CTUP1.25	1.25A		0.1694	2.34300
6CTU 1.50	6CTUP1.50	1.5A		0.1318	4.50000
6CTU 1.60	6CTUP1.60	1.6A		0.1126	5.12000
6CTU 2	6CTUP2	2A		0.1712	8.00000
6CTU 2.50	6CTUP2.50	2.5A		0.1113	12.5000
6CTU 3	6CTUP3	3A		0.0878	18.0000
6CTU 3.50	6CTUP3.50	3.5A		0.0672	24.5000
6CTU 4	6CTUP4	4A		0.0553	32.0000
6CTU 4.50	6CTUP4.50	4.5A		0.0476	40.5000
6CTU 5	6CTUP5	5A		0.0427	50.0000
6CTU 6	6CTUP6	6A		0.0324	90.0000
6CTU 6.30	6CTUP6.30	6.3A	0.0313	119.070	
6CTU 7	6CTUP7	7A	0.0150	147.000	
6CTU 8	6CTUP8	8A	0.0132	192.000	
6CTU 10	6CTUP10	10A	0.0097	400.000	
6CTU 12	6CTUP12	12A	0.0070	720.000	
6CTU 13	6CTUP13	13A	0.0065	845.000	
6CTU 15	6CTUP15	15A	0.0056	1125.00	
6CTU 20	6CTUP20	20A	0.0042	2400.00	
6CTU 25	6CTUP25	25A	0.0031	3750.00	
6CTU 30	6CTUP30	30A	0.0020	5400.00	

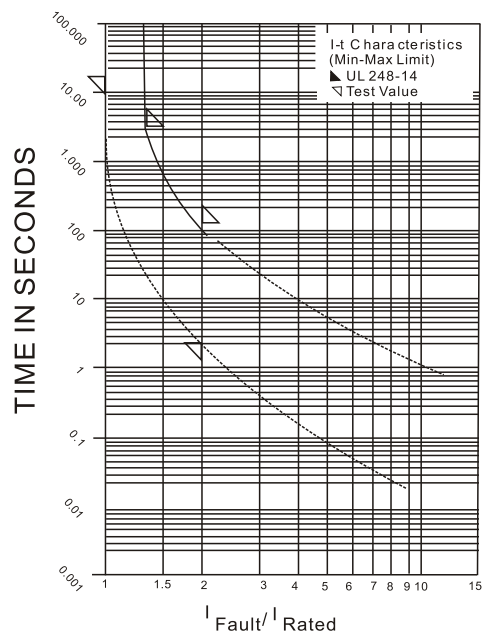

富源电子科技有限公司

富源电子科技有限公司

HTTP: //www.fuyuanfuse.com

E-mail:fuyuanfuse@163.com

地址:东莞市东城区下桥银桥工业区

TEL: 0769-23115816 FAX: 0769-23115819