


6. 3X32mm玻璃管慢断美规保险丝 Time-lag Glass Tube Fuse

Type 6GTU/6GTUP

6.3X32mm

Time-lag Glass Tube Fuse Series

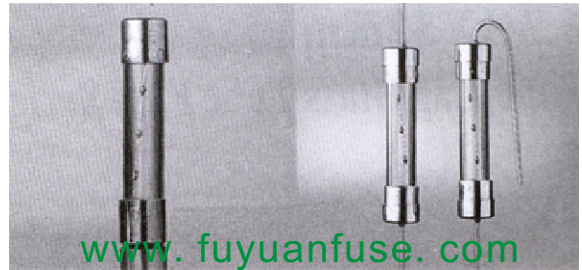

Approvals

6GTU/6GTUP	
UL Listed	10mA-10A
UL Recognized	12A-30A
CSA Certified	10mA-30A
MITI	1A-10A

Electrical Characteristics

Rated Current	1In		2In	
	MIN	MAX	MIN	MAX
10mA-3A	4 Hrs.	1hr	5 Sec	120 Sec
3.15A-30A	4 Hrs.	1hr	12 Sec	120 Sec

Interrupting Ratings

10mA-10A:	10,000 amperes at 125V Ac
10mA-1A:	35 amperes at 250V AC
1.2A-3.5A:	100 amperes at 250V AC
3.75A-10A:	200 amperes at 250V AC

Operating Temperature

-55°C to +125°C

Physical Specification

Materials

Glass body/Nickel Plated Brass Caps

Lead Wire:


Diameter \varnothing 0.8mm

Packaging


In Bulk:

6GTU-500 pcs;6GTUP-250 pcs per box

Mechanical Dimensions

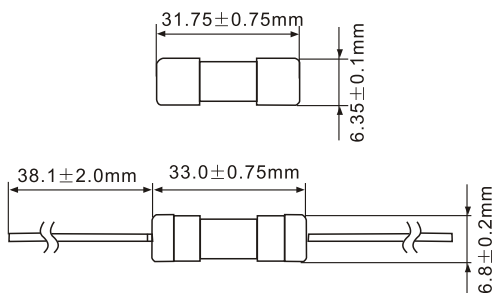

Cartridge catalog Number	Axial Lead Catalog Number	Ampere Rating (In)	Voltage Rating (v)	Nominal Resistance cold Ohms	Nominal Melting ¹ t A ² Sec
6GTU 0.10	6GTUP 0.10	100mA	250V	15.669	0.02000
6GTU 0.125	6GTUP 0.125	125mA		10.596	0.03125
6GTU 0.15	6GTUP 0.15	150mA		8.4090	0.05625
6GTU 0.16	6GTUP 0.16	160mA		7.6250	0.06400
6GTU 0.175	6GTUP 0.175	175mA		6.9250	0.07656
6GTU 0.18	6GTUP 0.18	180mA		5.9110	0.08790
6GTU 0.20	6GTUP 0.20	200mA		16.920	0.14000
6GTU 0.25	6GTUP 0.25	250mA		10.225	0.18750
6GTU 0.30	6GTUP 0.30	300mA		8.3170	0.31500
6GTU 0.315	6GTUP 0.315	315mA		8.0000	0.34720
6GTU 0.35	6GTUP 0.35	350mA		5.5000	0.42870
6GTU 0.375	6GTUP 0.375	375mA		4.3110	0.49210
6GTU 0.40	6GTUP 0.40	400mA		4.2090	0.80000
6GTU 0.50	6GTUP 0.50	500mA		2.4090	1.75000
6GTU 0.60	6GTUP 0.60	600mA		1.7740	2.88000
6GTU 0.63	6GTUP 0.63	630mA		1.6000	3.96900
6GTU 0.70	6GTUP 0.70	700mA		1.3400	4.90000
6GTU 0.80	6GTUP 0.80	800mA		1.0100	5.75000
6GTU 1	6GTUP 1	1A		0.6940	6.50000
6GTU 1.20	6GTUP 1.20	1.2A		0.4540	10.0800
6GTU 1.25	6GTUP 1.25	1.25A		0.4300	11.7180
6GTU 1.50	6GTUP 1.50	1.5A		0.2800	22.5000
6GTU 1.60	6GTUP 1.60	1.6A		0.3380	25.6000
6GTU 1.75	6GTUP 1.75	1.75A		0.2900	33.6880
6GTU 1.8	6GTUP 1.8	1.8A		0.2630	35.6400
6GTU 2	6GTUP 2	2A		0.2250	48.0000
6GTU 2.25	6GTUP 2.25	2.25A		0.1910	60.7500
6GTU 2.50	6GTUP 2.50	2.5A		0.1610	81.2500
6GTU 2.80	6GTUP 2.80	2.8A		0.1080	117.600
6GTU 3	6GTUP 3	3A		0.0952	135.000
6GTU 3.15	6GTUP 3.15	3.15A	0.0856	148.830	
6GTU 3.20	6GTUP 3.20	3.20A	0.0689	153.600	
6GTU 3.50	6GTUP 3.50	3.50A	0.0650	183.750	
6GTU 4	6GTUP 4	4A	0.0546	240.000	
6GTU 5	6GTUP 5	5A	0.0422	375.000	
6GTU 6	6GTUP 6	6A	0.0141	540.000	
6GTU 6.30	6GTUP 6.30	6.3A	0.0135	585.930	
6GTU 6.50	6GTUP 6.50	6.5A	0.0121	760.500	
6GTU 7	6GTUP 7	7A	0.0116	882.000	
6GTU 7.50	6GTUP 7.50	7.5A	0.0108	1012.500	
6GTU 8	6GTUP 8	8A	0.0093	1280.000	
6GTU 10	6GTUP 10	10A	0.0072	2500.000	
6GTU 12	6GTUP 12	12A	0.0053	4320.000	
6GTU 13	6GTUP 13	13A	0.0049	5070.000	
6GTU 15	6GTUP 15	15A	0.0041	6750.000	
6GTU 16	6GTUP 16	16A	0.0037	7680.000	
6GTU 18	6GTUP 18	18A	0.0033	9720.000	
6GTU 20	6GTUP 20	20A	0.0031	12000.000	
6GTU 25	6GTUP 25	25A	0.0024	18750.000	
6GTU 30	6GTUP 30	30A	0.0019	27000.000	

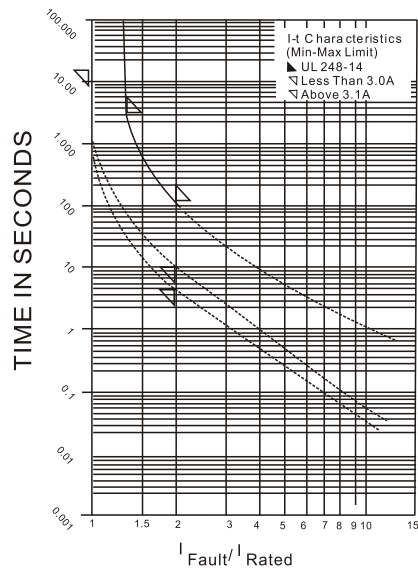

富源电子科技有限公司

富源电子科技有限公司

HTTP: //www.fuyuanfuse.com

E-mail:fuyuanfuse@163.com

地址:东莞市东城区下桥银桥工业区

TEL: 0769-23115816 FAX: 0769-23115819