

Fast Acting Ceramic Tube Fuse 6.3X32mm陶瓷管快断美规保险丝

Type 6CFU/6CFUP


6.3X32mm

Fast Acting Ceramic Tube Fuse Series



Approvals

6CFU/6CFUP	
UL Listed	10mA-15A
UL Recognized	15.1A-25A
CSA Certified	100mA-15A
MITI	1A-15A

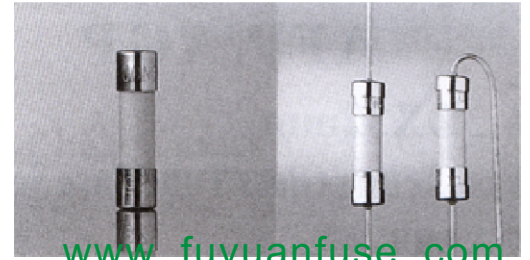

www.fuyuanfuse.com



富源电子科技有限公司

Electrical Characteristics

Rated Current	1In	1.35In	2In
	MIN	MAX	MAX
10mA-30A	4 Hrs.	1hr	30 Sec

Interrupting Ratings

10mA-10A:	10,000 amperes at 125V AC
10mA-1A:	35 amperes at 250V AC
1.2A-3.5A:	100 amperes at 250V AC
3.75A-10A:	200 amperes at 250V AC
10.1A-25A:	750 amperes at 32V AC

Operating Temperature

-55°C to +125°C

Physical Specification

Materials

Ceramic body/Nickel Plated Brass Caps

Lead Wire:


Diameter \varnothing 0.8mm

Packaging


In Bulk:

6CFU-500 pcs; 6CFUP-250 pcs per box

Mechanical Dimensions

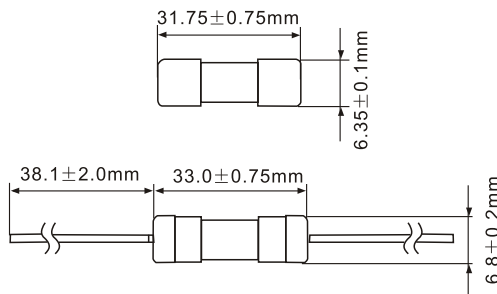

Cartridge catalog Number	Axial Lead Catalog Number	Ampere Rating (In)	Voltage Rating (v)	Nominal Resistance cold Ohms	Nominal Melting I ² t A ² Sec
6CFU .100	6CFUP.100	100mA	250V	14.600	0.00200
6CFU .125	6CFUP.125	125mA		10.200	0.00312
6CFU .150	6CFUP.150	150mA		7.7000	0.00450
6CFU .160	6CFUP.160	160mA		7.0000	0.00512
6CFU .200	6CFUP.200	200mA		6.0000	0.00800
6CFU .250	6CFUP.250	250mA		3.3500	0.01250
6CFU .300	6CFUP.300	300mA		2.8000	0.01800
6CFU .315	6CFUP.315	315mA		2.3000	0.01984
6CFU .350	6CFUP.350	350mA		2.0000	0.02450
6CFU .375	6CFUP.375	375mA		1.6500	0.02812
6CFU .400	6CFUP.400	400mA		1.4000	0.32000
6CFU .500	6CFUP.500	500mA		0.6120	0.07500
6CFU .600	6CFUP.600	600mA		0.4740	0.10800
6CFU .630	6CFUP.630	630mA		0.3850	0.11900
6CFU .700	6CFUP.700	700mA		0.3500	0.14700
6CFU .750	6CFUP.750	750mA		0.3200	0.16870
6CFU .800	6CFUP.800	800mA		0.2910	0.16870
6CFU 1	6CFUP 1	1A		0.2205	1.50000
6CFU 1.25	6CFUP 1.25	1.25A		0.1758	2.34300
6CFU 1.50	6CFUP 1.50	1.5A		0.1223	4.50000
6CFU 2	6CFUP 2	2A		0.0844	8.00000
6CFU 2.50	6CFUP 2.50	2.5A		0.0737	12.5000
6CFU 3	6CFUP 3	3A		0.0612	13.5000
6CFU 3.50	6CFUP 3.50	3.5A		0.0430	18.3750
6CFU 4	6CFUP 4	4A		0.0339	24.0000
6CFU 4.50	6CFUP 4.50	4.5A		0.0263	30.3750
6CFU 5	6CFUP 5	5A		0.0234	37.5000
6CFU 6	6CFUP 6	6A		0.0177	54.0000
6CFU 6.30	6CFUP 6.30	6.3A		0.0170	59.5350
6CFU 7	6CFUP 7	7A		0.0153	98.0000
6CFU 7.50	6CFUP 7.50	7.5A	0.0140	112.500	
6CFU 8	6CFUP 8	8A	0.0129	160.000	
6CFU 10	6CFUP 10	10A	0.0111	300.000	
6CFU 12	6CFUP 12	12A	0.0078	576.000	
6CFU 13	6CFUP 13	13A	0.0071	845.000	
6CFU 15	6CFUP 15	15A	0.0061	1125.00	
6CFU 16	6CFUP 16	16A	0.0053	1280.00	
6CFU 18	6CFUP 18	18A	0.0044	1620.00	
6CFU 20	6CFUP 20	20A	0.0041	2400.00	
6CFU 25	6CFUP 25	25A	0.0029	3750.00	
6CFU 30	6CFUP 30	30A	0.0023	5400.00	

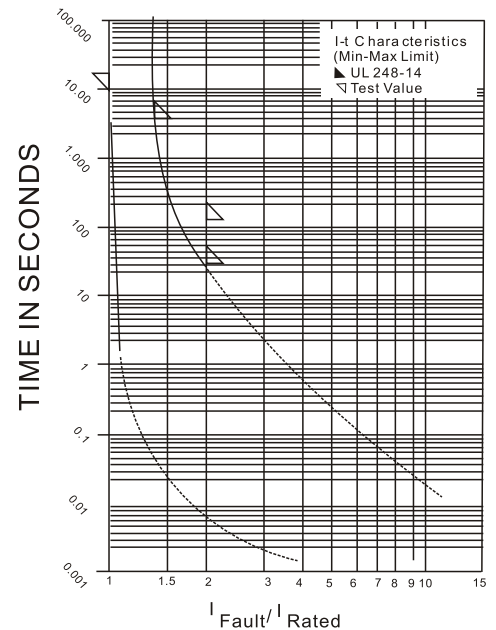

富源电子科技有限公司

HTTP: //www.fuyuanfuse.com

E-mail:fuyuanfuse@163.com

地址:东莞市东城区下桥银桥工业区

TEL: 0769-23115816 FAX: 0769-23115819